



HDX-69C-NOV

Dakota Digital HDX Instrument Installation For 1969-'76 Nova 1973-'75 Buick Apollo 1975-'76 Buick Skylark 1973-'76 Oldsmobile Omega 1971-'76 Pontiac Ventura




Installation


1. Remove the stock gauge bezel and cluster from the dash. Retain all hardware for reassembly




2. Remove the eight (8) screws holding the gauges to the bezel and save the screws for reassembly.

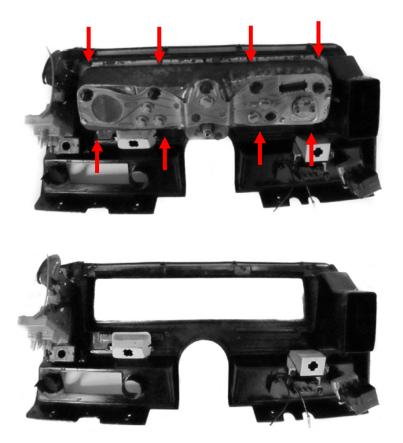

3. Attach the gauge cluster to the bezel using the stock screws from disassembly.

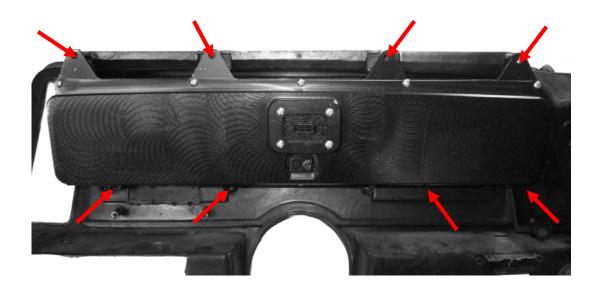

4. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the HDX system.

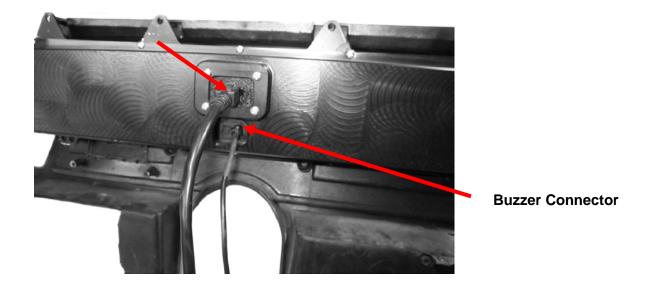

5. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North
Sioux Falls, SD 57107Phone (605) 332-6513
Fax (605) 339-4106www.dakotadigital.com
dakotasupport@dakotadigital.comCopyright 2011 - Dakota Digital, Inc.

Manual # 650592A