



## HDX-69C-CAM

Dakota Digital HDX Instrument Installation  
For 1969 Chevrolet Camaro

Your new HDX-69C-CAM kit includes:

### HDX Displays



### Universal Sender Pack

### Buzzer

### Installation Manuals

2X 10-32x1" Mounting Screws w/  
nylon washers

2X 10-32x1.5" Mounting Screws w/  
nylon shoulder washers



### Foam Tape



### Interconnect Harness



### Main Harness


### Control Box

## Installation


1. Remove the clear lenses, light bulbs, indicator light panels, and gauge internals; they are held into the housing with nuts from the backside. You may be able to access all of the fasteners with the dash carrier installed; removing the entire assembly may not be necessary.



2. For each gauge opening, cut three pieces of the supplied foam tape, 2" long. Install foam strips on the top and sides of each opening about ½" down from the face of the housing. This foam provides a cushion where the new HDX cans are installed and forms a tight, rattle-free fit.

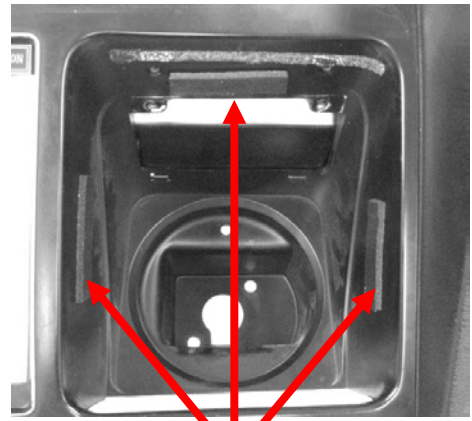


Foam tape

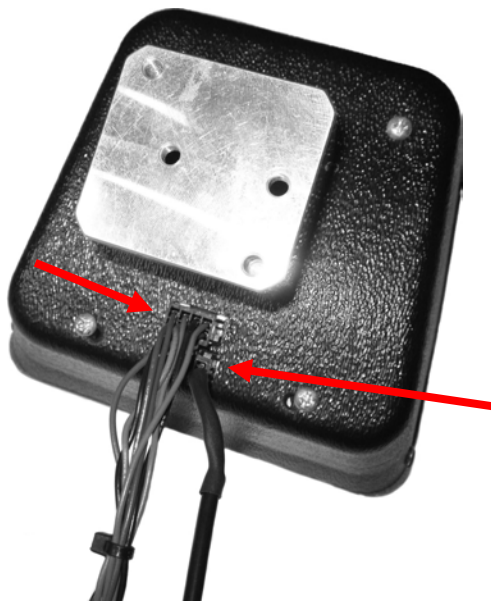


Buzzer Connector

3. Connect one end of the interconnect harness to the new HDX speed gauge as well as the Buzzer (optional for audio)


4. Route the other ends of the interconnect harness and the buzzer through the large opening shown below. Using the two provided **10-32 x 1.5"** screws and **nylon shoulder washers**, secure the speedometer assembly to the housing. Start the screws into the back of the factory housing and into the pull-block on the back of the gauge assembly. Tighten with a 1/8" Allen wrench.

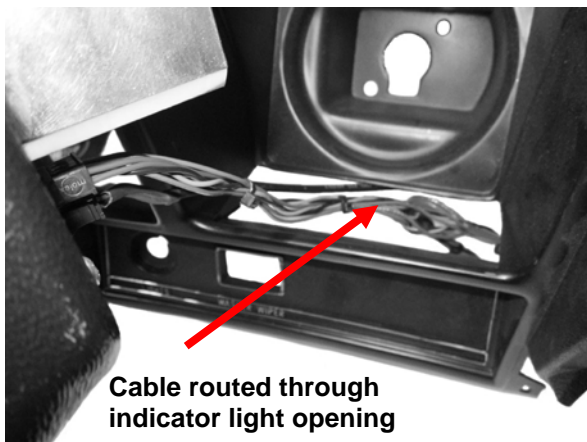


Cable routed through indicator light opening

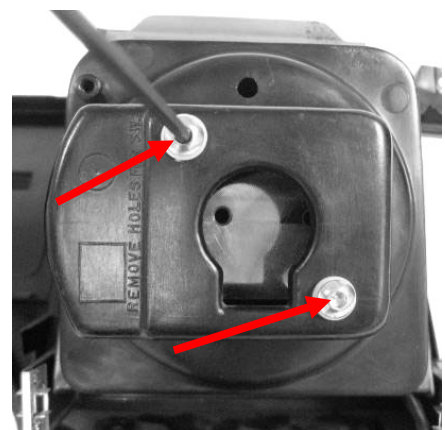

5. To install the tachometer, route the appropriate end of the interconnect harness back through the housing indicator light opening on the tachometer side of the housing and connect to the back of the tachometer gauge. Use the two **10-32 x 1" screws** and two **flat nylon washers** to secure the gauge

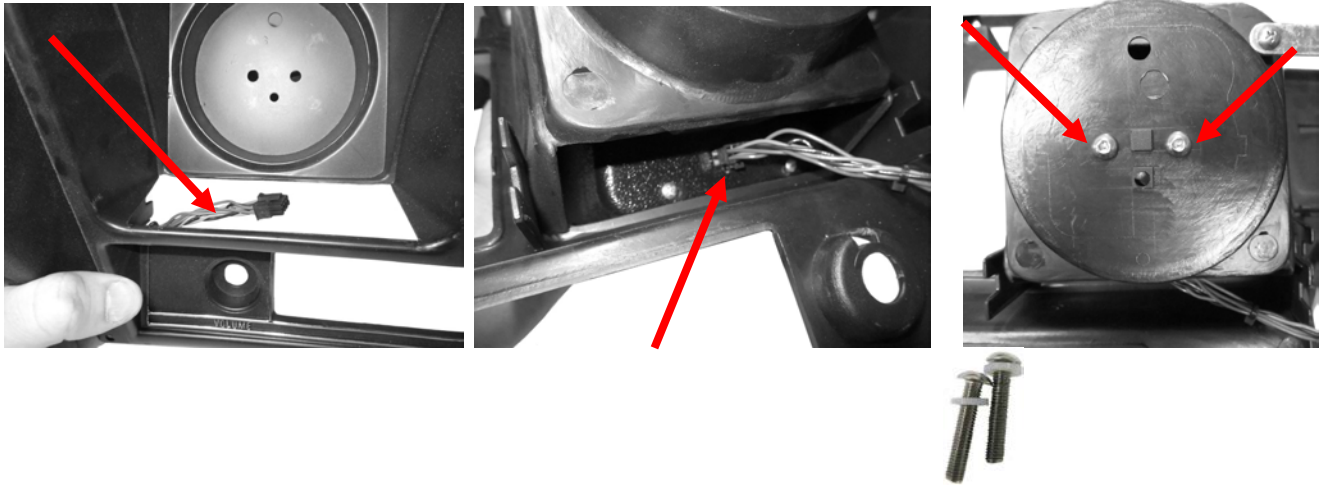

6. Connect the main harness to the interconnect harness and re-install the cluster into the vehicle.

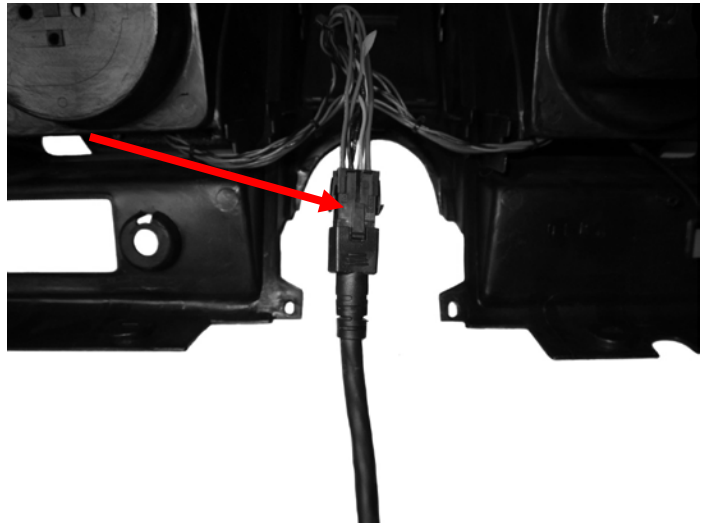

7. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the HDX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Phone (605) 332-6513  
Fax (605) 339-4106 Copyright 2011 - Dakota Digital, Inc.

Manual # 650566A