



HDX-70C-CAM

Dakota Digital HDX Instrument Installation For 1970-'81 Chevy Camaro

Your new HDX-70C-CAM kit includes:



Universal Sender Pack

Buzzer Installation Manuals

HDX Display



Installation


1. First remove the four screws holding the bezel to the dash. These four screws will be re-used for re-assembly.



2. Remove the four screws holding the gauges into the dash. These screws will be re-used for the VHX gauge installation.



3. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

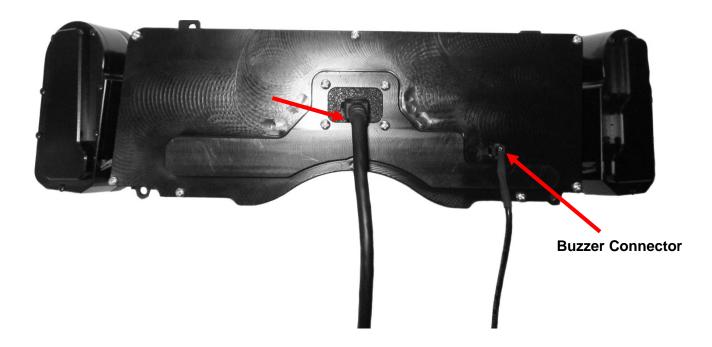

4. Secure the VHX system to the dash with the original four screws.



5a. Align the bezel over the gauges. Watch carefully so you don't scratch or damage the lens.



5b. The HDX system should align tightly and the lens should sit flush with the bezel.

6. Secure the bezel to the dash with the four original screws. Refer to the main manual for wiring instructions to complete the HDX installation.



▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.